





WINDOW GUARDS

GARDES DE FENÊTRE
PROTECTORES DE VENTANAS

www.mopar.com

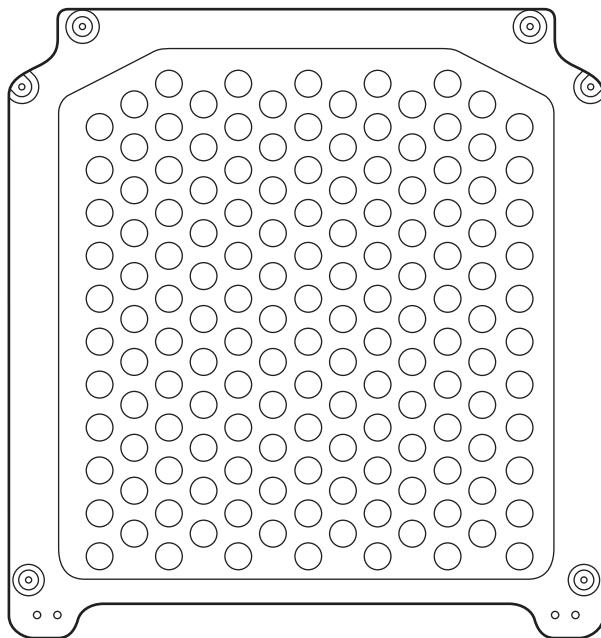

A 2X





B 2X



C 12X



D 12X





Mopar
Protective Sealant





FWD

NOTE: PLACE LOCATING DOWELS (B) IN HOLES INDICATED
REMARQUE: Installez les repères (B) comme indiqué.
Nota: instale las clavijas de posicionamiento (B) como se muestra



DRIVER SIDE DOOR Côté conducteur
Puerta del conductor

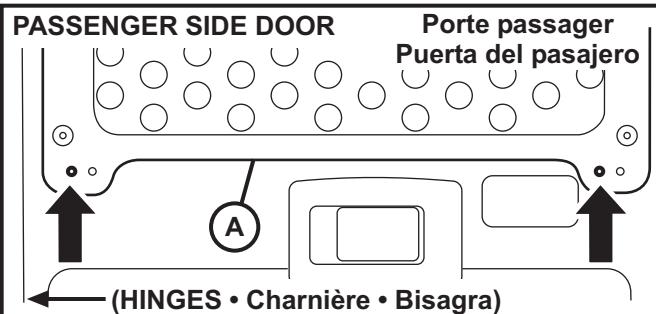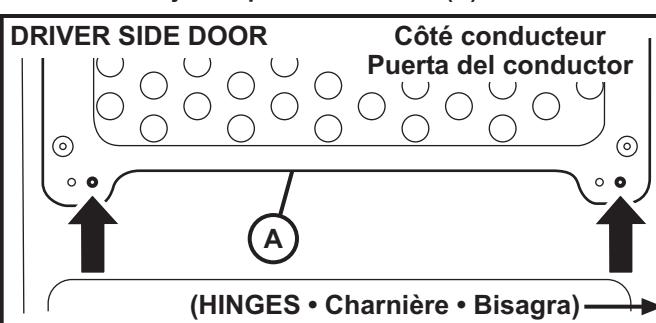

1

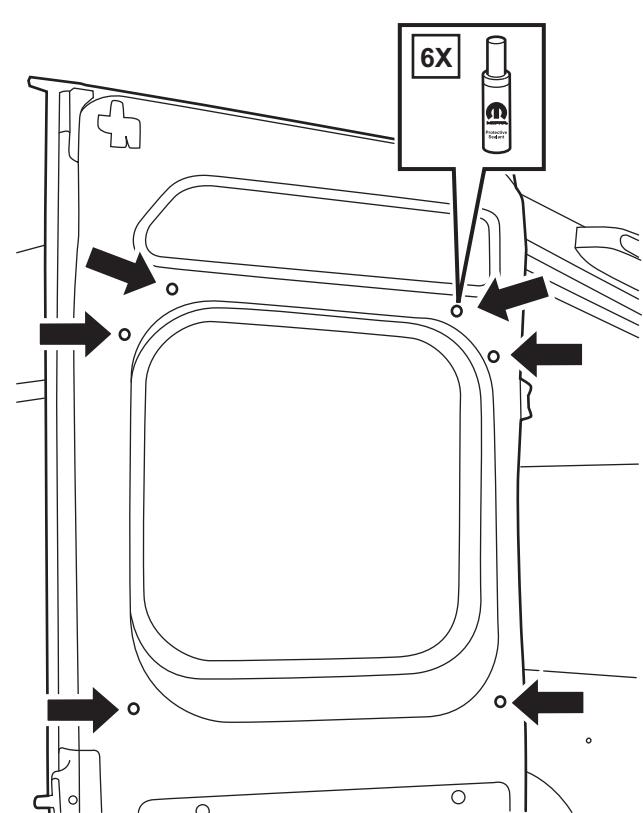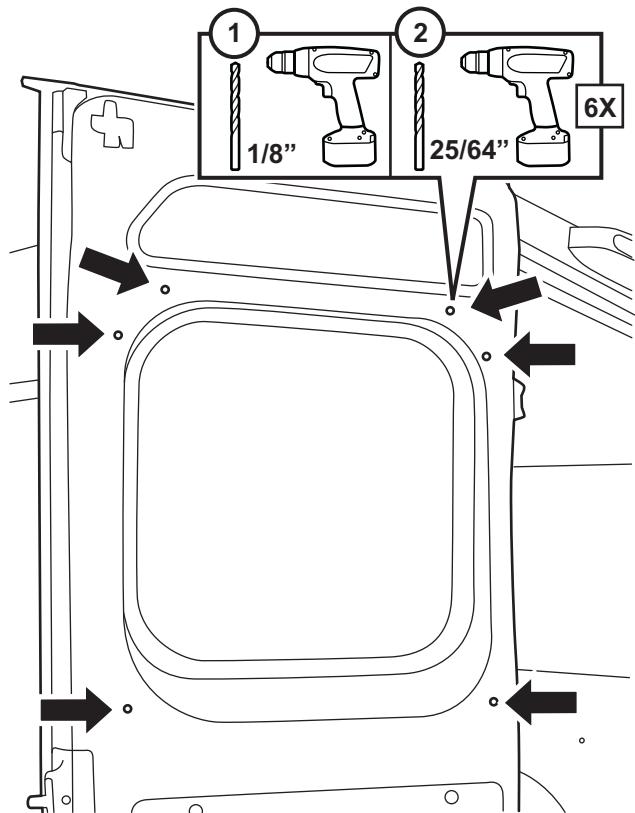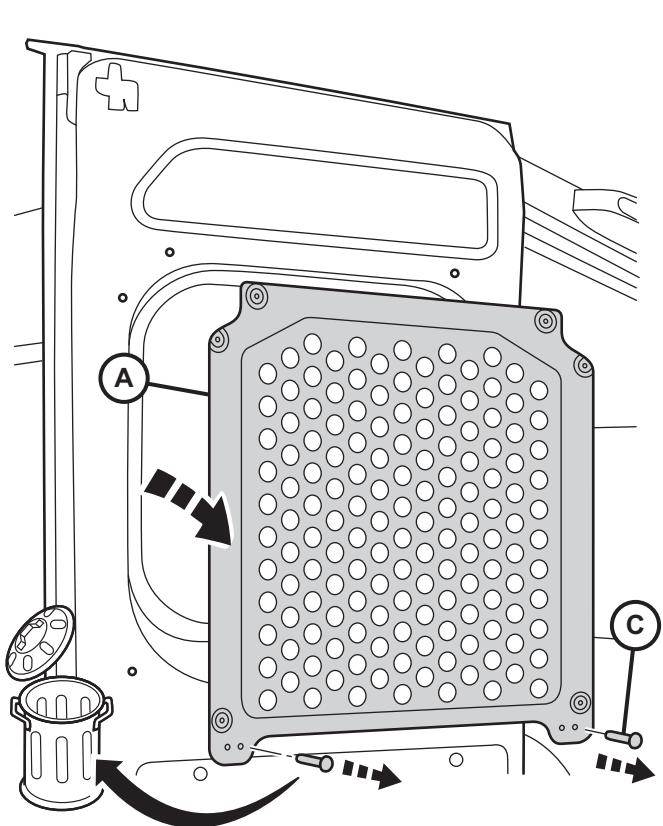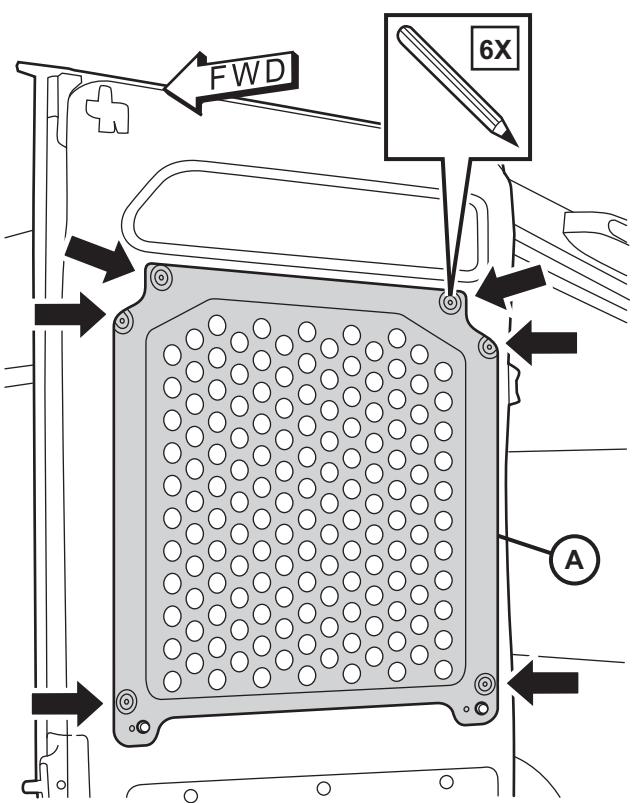

6 N m (6.6 ft. lbs.)
REF. RIVNUT TOOL
INSTRUCTION SHEET

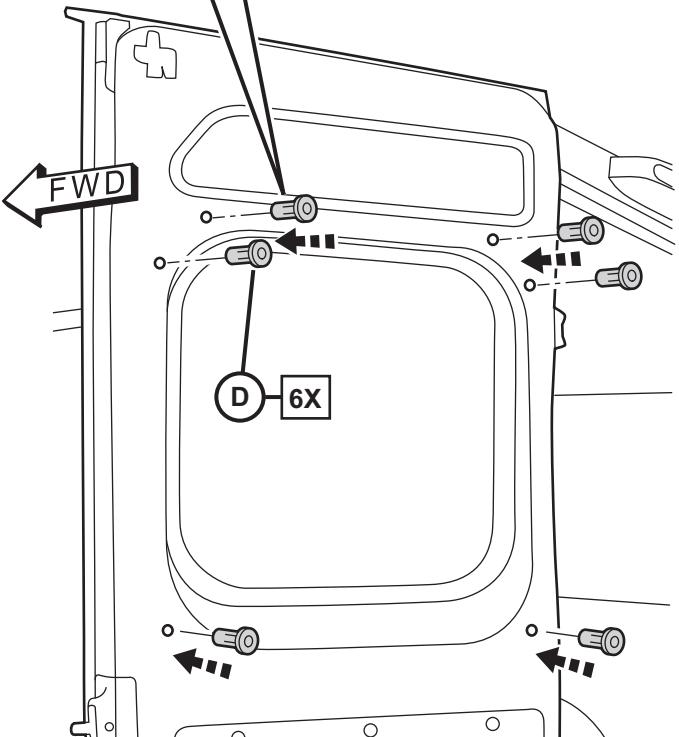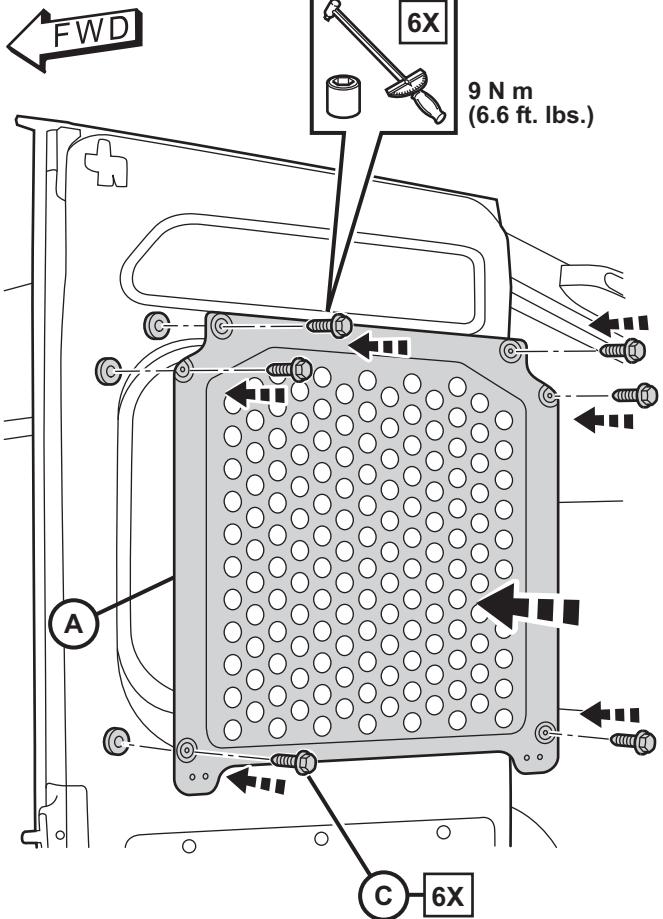**OR****6****7**

REPEAT STEPS 1 THROUGH 7 FOR OPPOSITE DOOR.
NOTE CORRECT HOLES FOR LOCATING DOWELS (C).

Répéter les étapes 1 à 7 pour la porte du côté opposé.
REMARQUE: Installez les repères (C) comme indiqué.

Repita los pasos 1 a 7 para la puerta del lado opuesto.
NOTA: Instale las clavijas de posicionamiento (C) como se muestra

8