


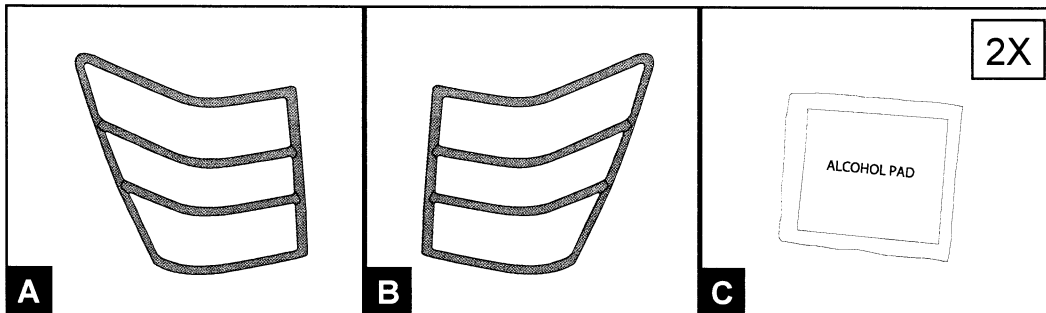

GB


- Tail Lamp must be at ambient condition (minimum 70°F/20°C) for a period of four (4) hours.
- Clean each vehicle Tail Lens with a rag to remove any dirt or debris, and allow to dry.
- Alcohol prep pads supplied **MUST BE** used per installation instructions
- Apply uniform pressure to the guard for thirty (30) seconds.
- Do not tug or pull on the Tail Lens Guards for 24 hours.
- Do not wash car for twenty-four (24) hours.

E

- La luz trasera debe estar a temperatura ambiente (mínimo 70° F / 20° C) durante un período de cuatro (4) horas.
- Limpie las lentes traseras de cada vehículo con un trapo, para eliminar cualquier suciedad o restos y dejarlas secar.
- Las almohadillas preparadas con alcohol que vienen con el producto **DEBEN** usarse siguiendo las instrucciones de instalación.
- Aplique una presión uniforme a la guarda durante treinta (30) segundos.
- No trate de mover o desplazar los protectores de las lentes durante 24 horas.
- No lave el auto durante veinticuatro (24) horas.

F

- Le feu rouge arrière doit être à température ambiante (minimum 70°F/20°C) pendant une durée de quatre (4) heures.
- Lavez chaque lentille arrière du véhicule avec un chiffon pour enlever toute trace de saleté ou de débris, et laissez sécher.
- Les tampons imbibés d'alcool **DOIVENT ÊTRE** utilisés en se conformant aux instructions.
- Exercez une pression uniforme sur le dispositif de protection pendant trente (30) secondes.
- Ne pas tirer sur les grilles de feu arrière pendant 24 heures.
- Ne lavez pas votre véhicule pendant vingt-quatre (24) heures suivant l'installation.

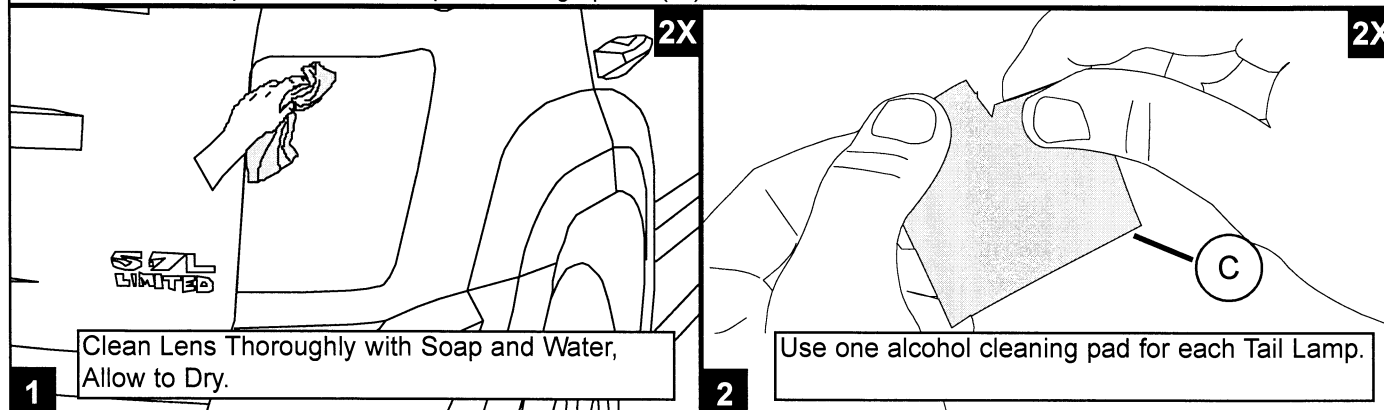

1 Clean Lens Thoroughly with Soap and Water, Allow to Dry.

2 Use one alcohol cleaning pad for each Tail Lamp.



2X

3

IMPORTANT - Vehicle must be at Minimum Ambient Temperature for four (4) hours.

2X

4

IMPORTANT - Align the guard Perfectly with the edge of the lamp closest to Liftgate.

2X

5

Lightly press the inner edge of guard to the lamp surface.

2X

6

Check alignment on three (3) edges shown, the outside edge may be slightly larger than lamp.

2X

7

Lightly press the outer edge of guard to the lamp surface.

2X

8

Check alignment on three (3) edges shown, the outside edge may be slightly larger than lamp.

2X

9

Firmly press guard uniformly for thirty (30) seconds.

10

No Car Wash for 24 Hrs.